



# 鉄筋コンクリートベンチフリューム2種 (JIS A 5372・附属書F 推奨仕様F-1) 国土交通省BF

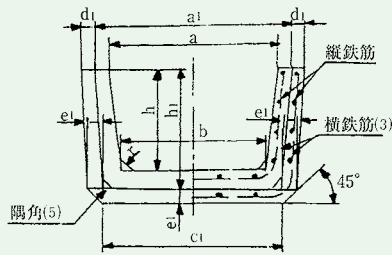

ソケット部断面

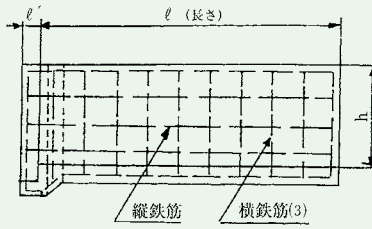

本体断面

(単位：mm)

種類	呼び名	内寸法 a × h	中央部寸法							ソケット部寸法						配筋				参考質量 (kg)		
			内幅		底幅		厚さ		深さ	長さ	半径	a	c	d	e'	h	l	縦鉄筋			横鉄筋	
			a	b	c	d	e	h	l	r	径							数量(本)	(4)径		数量(本)(7)	
																					1=2000 1=1000	
2種	200	200×150	200	170	205			150			280	250			195		3.2	8	(4)径	21	11	96
	250	250×175	250	215	250	30		175		30	330	295		40	220	50		9	2.6	23	12	113
	300	300×300	300	260	300		40	200		40	380	350	40	45	250		3.2	9	21	11	145	
	350	350×235	350	300	345	35	45	235			470	400	45	50	290				10	23	12	191
	400	400×260	400	345	395			260		50	500	455			320	60	4.0	4.0	21	11	240	
	450	450×295	450	390	440	40	50	295			550	500		55	355				4.0	21	11	269
	500	500×320	500	435	490		55	320	1000			610	555	55	60	385		12	5.0	23	12	327
	550	550×355	550	475	535	45	60	355	2000	60	660	605		65	425	70	12			21	11	382
	600	600×380	600	520	580			380			710	650			450		5.0	13	23	12	407	
	650	650×415	650	565	630		65	415			760	705	65	70	490							5.0
	700	700×440	700	610	680		70	440		70	820	760	70	75	520		80	14	D6	23	12	552
	800	800×490	800	695	770	50	75	490			920	855	75	80	575							
900	900×550	900	785	870		85	550		80	1030	965	85	90	645		15	15	D6	23	12	817	
1000	1000×600	1000	875	965	55	90	600		80	1130	1065	90	95	948								15
寸法の許容差	200~300		±3	-	±2	±2	±5	-	-	-	-	-	-	-	-							
	350~550		±5	-	+3 -2	±3	±5	-	-	-	-	-	-	-	-							
	600~1000		±7	-	+5 -2	±5	±5	-	-	-	-	-	-	-	-							